NOVA NFT250 Series Variable Orifice Steam Traps Unit Heaters

Pressures To 250 PSIG Temperatures to 450°F

Applications

- Steam Lines
- Process Equipment
- Steam Cookers
- Steam Heated Vats
- Pressing Machinery
- Oil Preheaters
- Converters
- Coils
- Rotating Drum

Proven Caged Stainless Steel Balanced Pressure Thermostatic Air Vent

> automatically discharges air and non-condensables

Stainless Steel Strainer

with large screen area prevents dirt problems

Connections

Sizes 1/2" - 2" screwed NPT (BSPT optional) Sizes 11/2" & 2" flanged **ANSI 250**

Weighted Stainless Steel Free Float Ball

multi-contact surface area modulates orifice discharge to provide smooth, continuous discharge and immediate response to load variations

Stainless Steel Sleeve

eliminates body erosion

Stainless Steel Seat

full bore prevents choking and permits ample capacities

Liquid Level

maintains seal over orifice to prevent live steam loss


Bottom & Side

Blowdown Connections

for preventative maintenance

Guarantee

Traps are guaranteed against defects in materials or workmanship for 3 years.

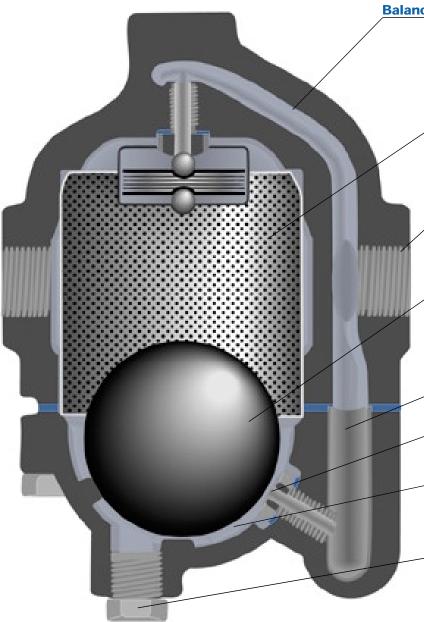

This document was created with Win2PDF available at http://www.win2pdf.com. The unregistered version of Win2PDF is for evaluation or non-commercial use only. This page will not be added after purchasing Win2PDF.